


CONFIGURACIÓN DE LÍNEA IP COPACO EN SOFTPHONE PARA SMARTPHONES

SoftphoneZoiper para terminales que utilizan Android:

Luego de descargar e instalar la aplicación, configurar la cuenta SIP de la siguiente manera:

- 1) **Username:** Colocar el número telefónico de la línea IP provisto por COPACO y el dominio utilizando el siguiente formato **+59521xxxxxx@copaco.com.py**.
- 2) **Password:** Completar con la clave provista por COPACO. Posteriormente hacer click en *Create an account*.

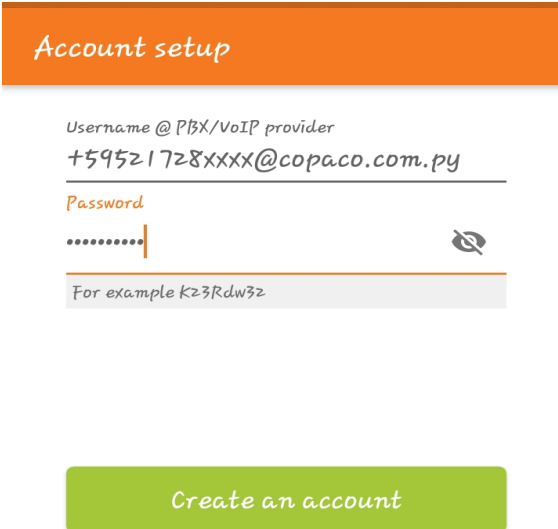

Account setup


Username @ PBX/VoIP provider
`+59521728xxxx@copaco.com.py`

Password
.....

For example k23Rdw3z

Create an account

- 3) **Hostname or provider:** Completar con el hostname **copaco.com.py** y luego click en *Next*.

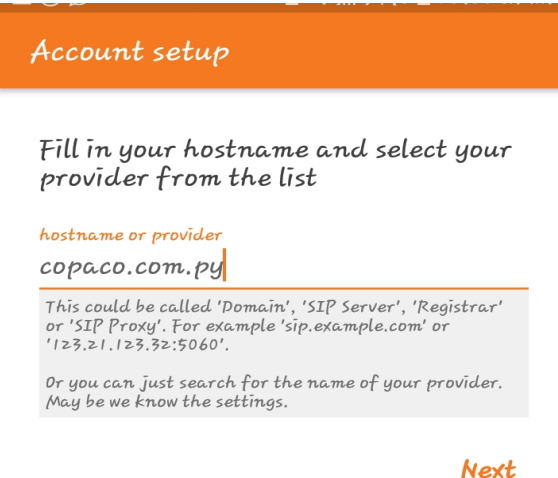

Account setup

Fill in your hostname and select your provider from the list

hostname or provider
`copaco.com.py`

This could be called 'Domain', 'SIP Server', 'Registrar' or 'SIP Proxy'. For example 'sip.example.com' or '123.21.123.32:5060'.

Or you can just search for the name of your provider. May be we know the settings.

Next

- 4) Habilitar la casilla de autenticación *My provider/PBX requires an authentication username or outbound proxy.*
- 5) **Authentication username:** Utilizar el formato **+59521xxxxxx@copaco.com.py.**
- 6) **Outbound Proxy:** Utilizar el valor **201.217.53.225:5060** y luego click en Next.

Account setup

- My provider/PBX requires an authentication username or outbound proxy*

Authentication username

+59521728XXXX@copaco.com.py

Outbound proxy

201.217.53.225:5060

This will usually like 10.10.10.0

Next

- 7) Seleccionar la opción **SIP UDP** y luego click en *Finish.*

Account setup

Please choose between the following configurations

SIP TLS Not found

SIP TCP Not found

SIP UDP Not found

IAX UDP Not found

Finish

8) Verificar que la cuenta se haya activado.

